HSF RoHS

SPECIFICATIONS
PERFORMANCE
Electical Rating: AC/DC 50V 0.5A
Insulation Resistance: 500MΩ
Withstang Volt: 200V AC/minute
Opratng Temperature: -40°to+105°
Material
Contact: Phosphor Bronze Gold-Plated
Housing: LCP

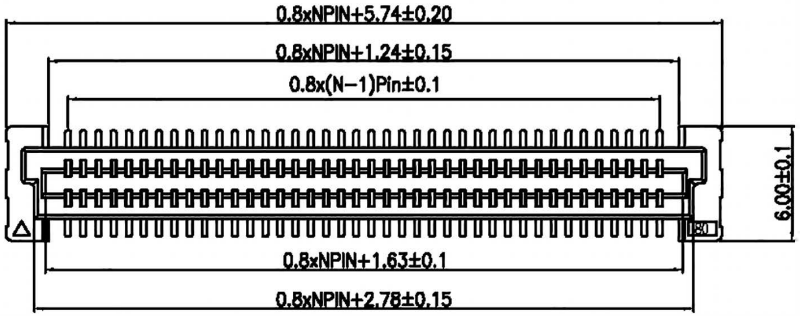



ASSEMBLY

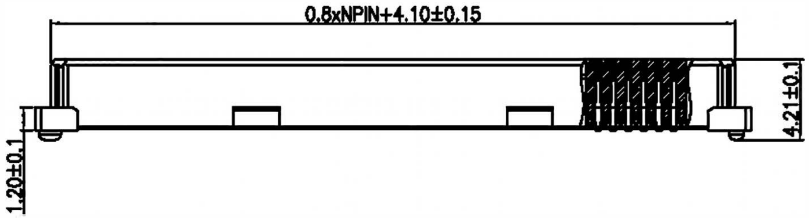



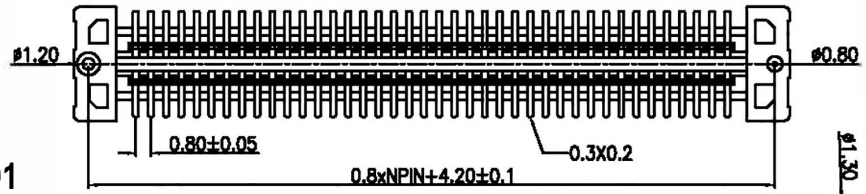

Ordering Information

3710 F XXX 037 XX F X 01

- F: F=Female, M=Male
- XXX: No.of pins 60,80, 100,140P
- 037: Plastic Hight 037=3.71mm
- XX: Contact Plating
  - G0:Gold Flash
  - G1:3U" Gold
  - G2:5U" Gold
  - G3:10U" Gold
  - G4:15U" Gold
  - G5:30U" Gold
  - S0:Gold Flash/Tin
- X: Packing T:Tube R:Reel

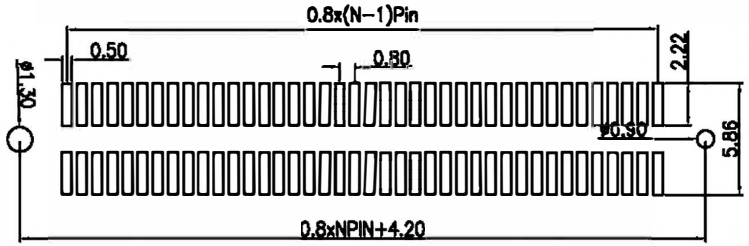

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

OPERATION				
X.X	±0.30	DRAW	BEN	12.03.28
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.	3710FXXX037XXFX01
TITLE:	0.80BTB NPin H3.71 Female